

# Comfort Digisystem product information

## Receiver DH10



# Receiver with crystal clear sound

### Receiver DH10

The DH10 is a small, modern receiver which can be used in combination with all Digisystem microphones. The integrated neck loop transfers the sound wirelessly to the hearing aid while this is in T-mode. Head- or earphones can be used alternatively. Volume and sound balance can easily be adjusted with discreet buttons on the side of the unit.

Equipped with the unique SecureStream Technology (SST) for excellent clear sound and eaves-drop-secure radio transfer in real time. Neck loops in different lengths are available as accessories.



### Unique characteristics

**SST (SecureStream Technology) – Digital sound transfer**  
This unique digital sound transfer between the transmitter and the receiver eliminates all transmission noise. Moreover, the signals are encrypted, so no one can overhear what is being said. Unlike other conventional encrypted systems, SST is free from time lag and crystal clear.

### FFC – Free Frequency Check

Indicates the suitable frequencies in the specific environment.



**Comfort Audio**  
HEAR THE FUTURE

# Technical facts

## Receiver DH10

### General

**Size:** 74 x 39 x 13 mm

**Weight:** 35 g.

### Special functions

**Balance:** Easily adjustable

**Fix volume:** Option to set fixed volume  
Volume control is switched off.

**Max volume:** Option to set max volume  
Volume control is limited.

**PIN-code:** Functions can be locked with a PIN-code.

### User interface

**Display:** Colored

**Menu:** Easy to navigate; automatic energy saver

**Menu languages:** English, French, Spanish

**Function indicator:** Easy-to-read, colored status information

**Manual:** USB or [www.comfortaudio.com](http://www.comfortaudio.com)

### Radio Transmission

**SST:** Secure Stream Technology – FSK, encrypted digital sound transfer.

**FFC:** Free Frequency Check – indicates the suitable frequencies in the specific environment.

**Frequencies receiver:** 904 – 927 MHz

**Range:** Approx. 30 m.


### Technical specifications

**Type of receiver:** SST




**Antenna:** Built-in

**Connections:** Neck loop, headphones/earphones

### Functions

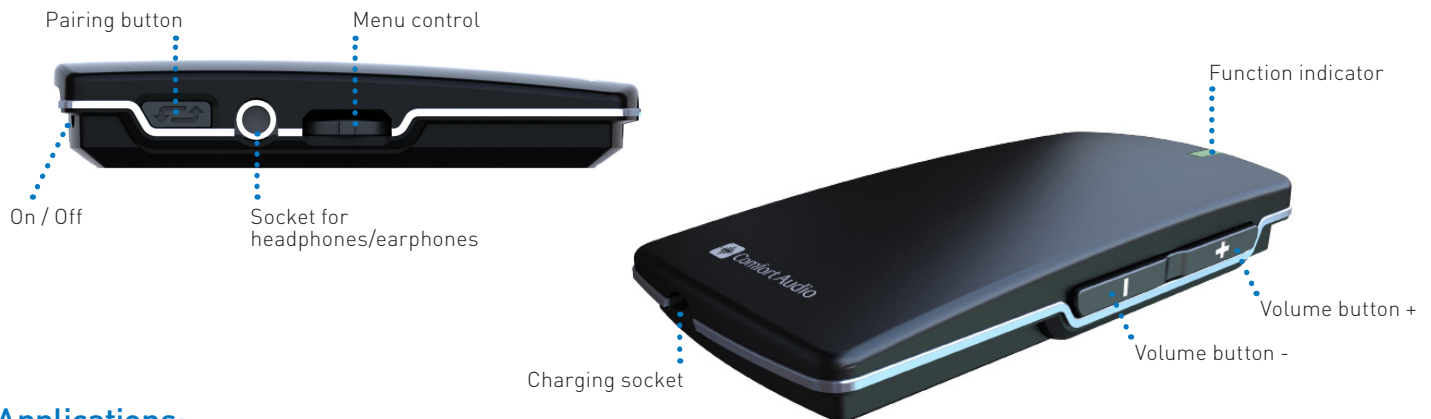

### Applications:

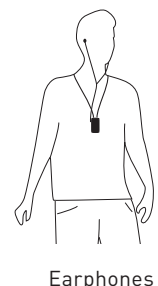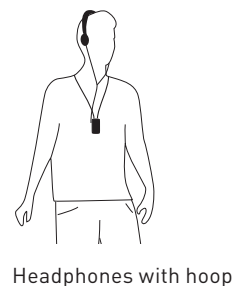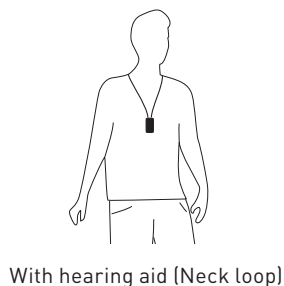

110929

### Canadian Distributor:

Supportive Hearing Systems Inc. | 283 MacPherson Avenue | Toronto, Ontario | M4V 1A4 CANADA  
Phone 1-800-732-8804 | [info@SimeonCanada.com](mailto:info@SimeonCanada.com) | [www.SimeonCanada.com](http://www.SimeonCanada.com)